

# **Process for obtaining refractory carbide based porous solid bodies, using organic compounds and a metal or metalloid.**

**Patent number:** EP0440569  
**Publication date:** 1991-08-07  
**Inventor:** DUBOTS DOMINIQUE (FR)  
**Applicant:** PECHINEY ELECTROMETALLURGIE (FR)  
**Classification:**  
 - international: C04B35/56; C04B38/00  
 - european: C04B38/00C  
**Application number:** EP19910420026 19910128  
**Priority number(s):** FR19900001577 19900129

## **Also published as:**


US5217930 (A1)  
 JP4228482 (A)  
 FR2657603 (A1)  
 EP0440569 (A3)  
 EP0440569 (B1)

## **Cited documents:**

FR1484116  
 US4536358  
 US3859421  
 US4067956  
 US4818732

Abstract not available for EP0440569  
 Abstract of corresponding document: **US5217930**

A porous refractory carbide with a large specific surface area is disclosed. The refractory carbide has a skeleton of metallic or metalloid refractory carbide and has a bimodal open porosity with a group of pores of 1 to 100 microns and a group of pores smaller than 0.1 micron.

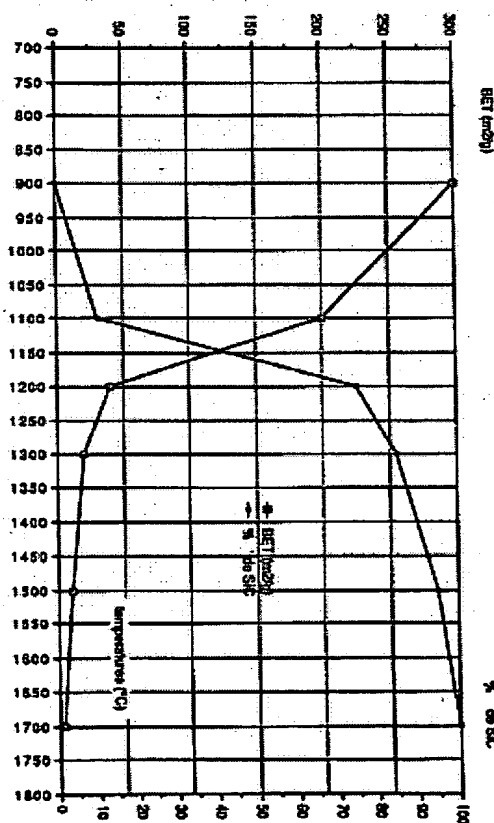

**FIG.1**

Data supplied from the **esp@cenet** database - Worldwide